



MOBILE 25/25 PRIME S


Cod. PR-OF300-025-M, PR-OF300-025-HD

Oil free compressor, excellent portability thank to the high handle and air tyres. Very low noise level, inlet flow rate 360 lt/min, tank capacity 25 l.

This model is available in standard version and HD version (for heavy duty cycle and with 10 bar maximum pressure).

Cod.	Air capacity		FAD Fad @ 5bar		Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
MOBILE 25/25 PRIME S PR-OF300-025-M	m³/min	l/min	m³/min	l/min	kW	230V 50Hz	l	db(A)	70 %	bar	mm	Kg
	0.36	360	0.225	225	2.2		25	66		8	510x600x830	49
MOBILE 25/25 PRIME S PR-OF300-025-M-HD	m³/min	l/min	m³/min	l/min	kW	230V 50Hz	l	db(A)	100 %	bar	mm	Kg
	0.36	360	0.225	225	2.2		25	69		10	510x600x830	49

Air delivery performance

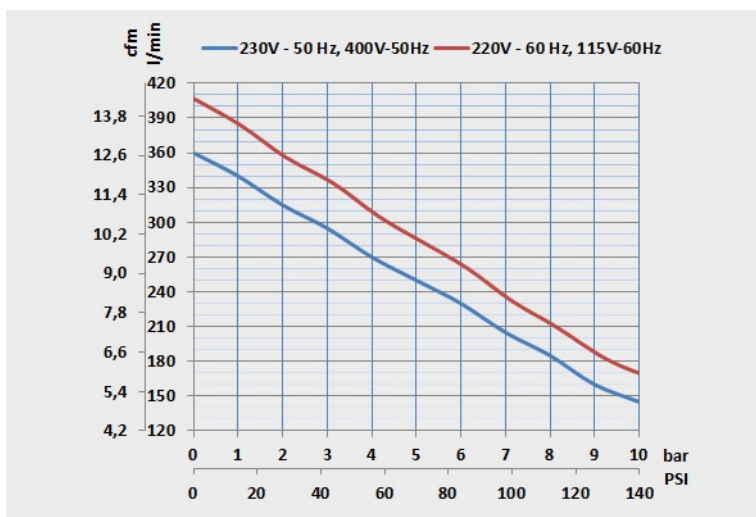

Images

